



Fall Protection For the Wind Energy Industry



FROM THE WORLDWIDE

EXPERTS IN FALL PROTECTION & RESCUE





WIND ENERGY

This industry specific catalog is dedicated to keeping wind energy workers safe while on the job!

Fall protection is a complicated issue and one of the most important faced by an employer or worksite supervisor. With over 100,000 reported incidents per year, falls from heights almost always result in serious injury. In the wind energy industry, lack of proper fall protection can have serious consequences, even death.

Contents

Wind Energy Applications	
• <i>Wind Turbine Construction</i>	4
• <i>Wind Turbine Maintenance</i>	5
• <i>Wind Turbine Rescue/Evacuation</i>	6
i-Safe™ Intelligent Safety System	7
Full Body Harnesses	8-9
Shock Absorbing & Positioning Lanyards	10-11
Self Retracting Lifelines	12-13
Vertical Systems	14-15
Rescue, Escape, & Descent Systems	16-19
Anchorage & Anchorage Connectors	20
Accessories	21
Training & Consulting	22



DBI-SALA PRODUCT NAMES ARE REPRESENTED IN BLUE TEXT

PLEASE NOTE : IN THE PRODUCT SECTIONS,



PROTECTA PRODUCT NAMES ARE REPRESENTED IN RED TEXT

USA : 800 328 6146 • Canada : 800 387 7484

Asia : +65 6558 7758 • Australia : 1800 245 002

New Zealand : 0800 212 505 • Europe, Middle East, Africa : +33 (0)4 97 10 00 10

Northern Europe : +44 (0) 1928 571324



DBI-SALA & PROTECTA

Leaders in Wind Energy Industry Fall Protection

Meeting wind energy challenges

We understand that the Wind Energy industry is a diversified work environment. Not only is it constantly changing as the work progresses and technology evolves, but the industry itself is always innovating with new procedures and materials that present new challenges for your fall protection plan.

Wind energy employees work in multiple scenarios where safety is always foremost on the job. These environments are specialized and multi-disciplined, demanding a full range of fall protection solutions to meet the needs of a variety of workplaces. That is why employers turn to Capital Safety, the makers of the two leading industry brands DBI-SALA & PROTECTA for industry expertise, superior quality products and continual systems innovation.

While both brands operate with a similar commitment to safety and quality, each brand has its own brand promise. DBI-SALA, which represents the ultimate in fall protection for any work environment, is supported by a commitment to Excellence, Innovation and Broad Range. PROTECTA represents fundamental fall protection at an exceptional value and is supported by a commitment to Reliability, Quality and Economy. The combination of the two brands provides our customers access to two great lines that serve the fullest range of product and value requirements.

A reputation for innovation

Many companies are generalists in safety, but Capital Safety is the only global company that has always been dedicated entirely to fall protection and rescue.

Our ISO 9001-2000 certification drives superior engineering, quality manufacturing and unparalleled customer services. Our design and engineering teams excel at finding the best way to keep workers totally safe and comfortable.

We have the industry's:

- Highest number of engineers
- Largest patent portfolio with over 180 patents
- Greatest number of industry firsts

Combining experience and knowledge with state-of-the-art outdoor and indoor testing procedures, we produce the most technologically advanced safety equipment in the world. This equipment exceeds both national and international standards, including OSHA, ANSI, CSA, CE and AS/NZS. We call it "creating a higher standard of safety."

Your partner in safety

Our service doesn't end with the sale. We understand the wind energy industry and your precise fall protection needs. The highly trained professionals at Capital Safety educate, train and provide extensive long term support to ensure that all aspects of your fall protection program are successful. Whether you choose DBI-SALA or PROTECTA you can be assured that all the demands the wind energy industry places on you are met head on with safety leading the way.

DBI-SALA & PROTECTA—your one-stop for the most comprehensive collection of innovative fall protection products for the Wind Energy industry!

The A, B, C's of Personal Fall Protection

DBI-SALA & PROTECTA offers a complete array of passive and active fall arrest systems. The basics of every personal fall arrest system can be described as the ABC's of fall arrest.

A

ANCHORAGE


Anchorage means a secure point of attachment (structure) for the fall arrest system. The type of anchorage varies with the industry, the job being performed, the type of installation and the structure available. The anchorage connector provides a means of attaching the system to the anchorage (structure).



B

BODY SUPPORT

Full body harnesses provide a connection point on the worker for the personal fall arrest system. Depending on the application, they can be used as part of a system to protect the worker from falling and to limit the extent of potential injury in case of a fall.



C

CONNECTORS

Connectors are devices used to connect the worker's full body harness to the anchorage system. Connectors include lanyards, snap hooks, carabiners, deceleration devices and specialty systems such as self retracting lifelines, ladder climbing systems, vertical lifelines and rope grabs.



D

DESCENT/RESCUE

Rescue and retrieval of a fallen worker is a required component of any Fall Protection Program.



Wind Energy Industry Applications

WIND TURBINE CONSTRUCTION

Fall protection challenges

- When constructing wind turbines there are several danger areas where the worker is left open to fall risk.
- Tower Erection involves the use of the ladder system installed in the individual sections of the tower, some of which have a vertical fall arrest system in place which can be utilized, some which do not.
- Nacelle work involves the installation of electrical control units, all of which will require cabling to be installed through the length of the tower. Whether working from the ladder or from a service lift, a minimum of a full body harness and lanyard will be required.
- Workers will be required to work all day in fall arrest equipment. Harnesses used will need to be comfortable, lightweight, and have multiple anchor points. In addition, the equipment should incorporate tool carrying accessories and be very durable and built-to-last.
- For added comfort and safety in these difficult to access areas, accessories such as the Hydration System and Trauma Relief Straps should be used.
- While working in the upper reaches of the tower, rescue can be almost impossible from the ground by conventional methods. Self rescue, personal evacuation and easy to use casualty evacuation equipment is a necessity for personnel working on wind turbines.



A Anchorage

Temporary

Tie-Off Adaptor

Pass thru design provides a safe and easy way to anchor a fall protection device to an overhead location. 1-3/4" (44mm) polyester strap, 3" (76mm) wear guard, zinc plated steel hardware.
See Pg 20 for your region's compliant products



B Body Support

Standard

ExoFit™ Wind Energy Harness

Vest style with PVC coated front, back and side D-rings, quick connect buckles, with sewn-in hip pad & belt and dorsal & lumbar protection (shown on left).
See Pg 9 for your region's compliant products



C Connectors

Fixed Length

Force2™ 100% Tie-Off Lanyard

Features a nylon shock pack with a PVC resist cover to protect against abrasion while climbing and descending. Elastic Webbing, 2000125 SafLok Max™ Hooks on leg ends (6ft / 1.82 m).
See Pg 11 for your region's compliant products




Wind Energy Industry Applications

WIND TURBINE MAINTENANCE

Fall protection challenges

- Maintenance of wind turbines is often very dangerous because it's conducted at extreme height or in very confined areas.
- Tower Maintenance involves the use of the ladder system installed in the individual sections of the tower, or the installed service lift to access electrical conduits and structural sections. In either case, a full body harness will be required, and either a ladder safety system or a lanyard to anchor into the lift.
- Maintenance and repair of the control mechanisms for the blades will involve accessing the hub of the blades from the outside of the Nacelle. Specialized fall protection systems and anchorages will be required such as the Self Contained Vacuum Anchor.
- Blade cleaning involves specialist access equipment and rope access techniques, and can be extremely hazardous and dangerous without the correct equipment.
- Workers will be required to work all day in fall arrest equipment. Harnesses used will need to be comfortable, lightweight, and have multiple anchor points. In addition, the equipment should incorporate tool carrying accessories and be very durable and built-to-last.
- For added comfort and safety in these difficult to access areas, accessories such as the Hydration System and Trauma Relief Straps should be used.
- While working in the upper reaches of the tower, rescue can be almost impossible from the ground by conventional methods. Self rescue, personal evacuation and easy to use casualty evacuation equipment is a necessity for personnel working on wind turbines.

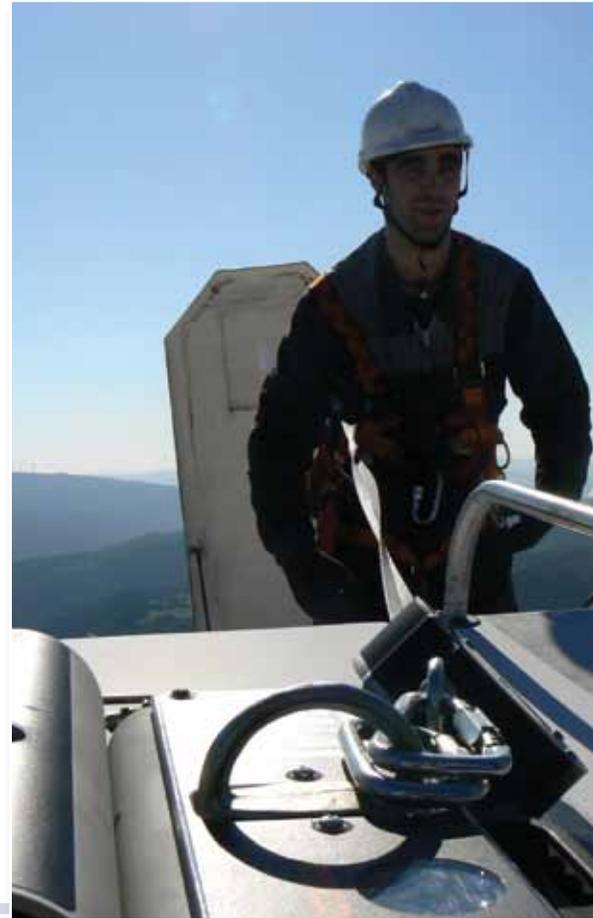

A Anchorage

Permanent

Lad-Saf® Ladder Safety System

The shock absorbing top bracket and tension indicating bottom bracket serve as the anchor for the steel cable which runs the length of the climbing area. The sleeve prevents falls by locking onto the cable and automatically follows the user as they climb or descend.
See Pg 14 for your region's compliant products



B Body Support

High Performance

ExoFit™ Wind Energy Harness

Vest style design with PVC coated front, back and side D-rings, quick connect buckles and dorsal protection.
See Pg 9 for your region's compliant products



C Connectors

More Mobility

Ultra-Lok® Self Retracting Lifeline

Flexible lifeline pays out as the user moves away and automatically retracts as the user moves towards the device. In the event of a fall, a speed sensing brake engages stopping the workers fall and reducing fall arrest forces to a safe level.
See Pg 13 for your region's compliant products



Wind Energy Industry Applications

WIND TURBINE RESCUE / EVACUATION

Fall protection challenges

- While working in the upper reaches of the tower, rescue can be almost impossible from the ground by conventional methods. Self rescue, personal evacuation and easy to use casualty evacuation equipment is a necessity for personnel working on wind turbines.
- The essence of evacuation or rescue is speed. Rapid descent, available for multiple users in the event of fire or complete mechanical failure is an absolute must for personnel constructing or maintaining the wind turbine.
- Self rescue and casualty evacuation could be needed at any point along the tower, including the Nacelle at the top.
- All rescue and evacuation equipment should be quick and easy to use. Non-installed, or temporary equipment will need to be light-weight and quick to use in relatively confined areas.



A Anchorage

Temporary

Cable Choker

Pass thru design provides a safe and easy way to anchor a fall protection or escape device to an overhead location. 7x19 3/8" (9.5mm) stainless steel cable with pass thru O-rings, 6 ft. (1.8m) in length.

See Pg 20 for your region's compliant products



B Body Support

High Performance

ExoFit™ XP Tower Climbing Harness

Removable shoulder, back, leg padding and 3-D mesh lining with soft edging for ultimate comfort. Stand-up back D-ring with impact indicator and tongue buckle body belt with hip pad and side D-rings for versatility. A seat sling with positioning D-rings provides added support.

See Pg 9 for your region's compliant products



C Connectors

Rescue

Rollgloss® R500 Rescue & Escape Device

Quick and safe operation for rescue and evacuation from heights for one user or two users. Features 9.5mm super static kernmantle rope and configured with connecting hardware at each end of the lifeline.

See Pg 18 for your region's compliant products



Introducing the...



The system allows you to easily record and access information on inspections, inventory and purchase information. Track equipment assignments by worker or location. View or download safety and equipment instructions, and more!

Inspection Tracking

- Up-to-date inspection logs for product reliability and safety
- Verification system to promote compliance
- Electronic record for traceability and audit

Inventory Control

- Tracks inventory on the site or around the globe
- Paperless and accurate asset management
- Easy retrieval of information for inventory control
- Theft and diversion prevention

Information Management

- Real time website support for consultative safety solutions
- Instant access to key information to streamline logistics and safety management
- Accountability by logging product and inspection status by job

The i-Safe™ system is enabled by RFID (radio frequency identification), a wireless data collection technology. i-Safe™ consists of passive RFID tags (transponders), scanned by PDA readers (receivers) that synchronize data with a web-enabled information portal.



i-Safe™ RFID Tags

i-Safe™ tags are now standard equipment on DBI-SALA products. Each tag is programmed with a unique ID that registers its model type and history.



PDA Readers

Tags are read by an on-site PDA that scans and accounts for equipment by a unique number. One click entry logs inspections, equipment assignments by worker or location, and more.



Web Portal

Data is linked from the PDA or laptop to your customized web portal. Your safety program website provides access to related safety & equipment information, training records, product advisories and useful links.



Retrofitting Kits

Easy do-it-yourself retrofitting kits are available for all types of harnesses, lanyards and SRL's, allowing you to extend the benefits of your i-Safe™ system to your entire inventory regardless of brand.

MODEL #	DESCRIPTION
9000038:	i-Safe™ Enabled PDA Ready for use with i-Safe™ Mobile
9000042:	Docking Station for downloading data
9000041:	Rubber protective boot for PDA to protect from impact.
9502425:	i-Safe™ Cable/SRL Retro-Fit Tag, 6-Pack
9503818:	i-Safe™ Universal Hard Retro-Fit Tag, 6-Pack w/ zip-tie, adhesive pad and key-ring
9503819:	i-Safe™ Universal Hard Retro-Fit Tag, 25-Pack w/ zip-tie, adhesive pad and key ring
9502059:	i-Safe™ Soft Choker Retro-Fit Tag, attach to most fall protection equipment, 6-Pack
9502553:	i-Safe™ Soft Choker Retro-Fit Tag, attach to most fall protection equipment, 25-Pack



DBI-SALA & PROTECTA FULL BODY HARNESSES

Engineered for Quality

Our reputation for quality provides peace of mind in selecting a full body harness. Quality in a harness means maximum comfort, freedom of movement and ease of use. Industry innovations such as the spring-loaded stand-up back D-ring and the No-Tangle Delta™ Pad demonstrate our commitment engineering and ingenuity.

A full body harness is designed with straps to fasten around the user in order to distribute fall arrest forces over at least the upper thighs, pelvis, chest and shoulders. This moves the impact of a fall from the internal organs to the major bone and muscle groups around the pelvis. The full body harness includes a means for attaching to the other components of a fall arrest system. Harnesses must meet strict OSHA, ANSI, CSA, CE, and AS/NZS standards.



FULL BODY HARNESS OPTIONS

Harnesses are available in many models with various options and features depending on their intended use.



EXOFIT™ XP FULL BODY HARNESSES

The ExoFit™ XP design is based on the concept of a single piece of material constructed in the shape of an "X" that wraps around you for the ultimate in no-tangle donning and comfortable security. From the moment you put it on, the ExoFit™ XP exceeds anything you've ever worn in a fall protection harness. The materials are soft and lightweight, yet extremely durable. The shoulder, hip and leg padding is removable so it can be washed. The breathable 3-D mesh lining guarantees you'll stay dry and comfortable every day. And the quick-connect buckles are fast, efficient and totally secure! A spring loaded "stand-up" back D-ring with impact indicator provides quick and safe connections.



EXOFIT™ FULL BODY HARNESSES

These harnesses incorporate all of the great features of the "XP" above except the ExoFit padding is sewn-in and they do not include the stand-up back D-ring



DELTA™ II FULL BODY HARNESSES


Our exclusive Patented Delta No-Tangle™ design holds the shape of the harness, adding to your comfort, and making it easier to put on. The integrated spring loaded stand-up back D-ring is an "industry first" and provides the user with quick connection - enhancing ease-of-use and worker productivity. Optional Delta™ Comfort Pad accessory can be added for wrap-around comfort for longer hours of wear with less fatigue. Multiple styles, models, configurations and sizes are available in the Delta™ II line.

PRO™ FULL BODY HARNESSES

A variety of styles and sizes are some of the features that make the PRO Harness an easy choice. PRO Line Harnesses provide comfort and added safety - which translates to reduced worker fatigue and increased productivity. The updated colors, improved fit, better webbing, and lightweight hardware provides safety and value without compromise.

Choosing Your Harness

Harnesses for multiple uses, harnesses for suspended work, harnesses for positioning belts - you can choose your equipment to suit the work you will be doing. The dorsal anchorage D ring is the best point of attachment to use for fall prevention. The anchorage points on the front of the body are used as fall arrest measures during access (ascent using a glider on a rope, or with a system fixed to a cable or a rail) or during work on such features as inclined roofs. Less often, the anchorage points on the front of the body may be used for rescue, or when work is carried out in confined spaces. Work on ropes is undertaken using the D ring or the specially designed suspension rings located in the abdominal area. If the work to be carried out requires the use of a positioning lanyard, you should choose a harness that includes a positioning belt as well as the anchorage points that are vital for fall arrest.

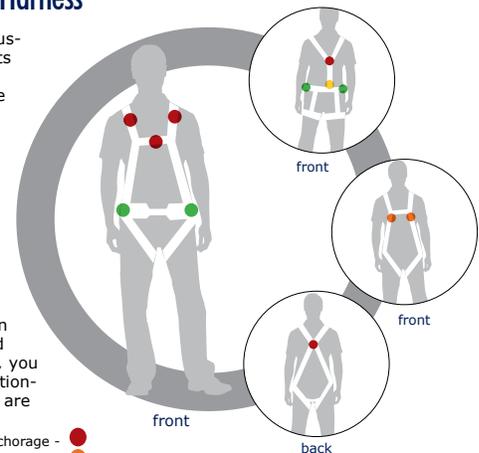


- D ring for fall arrest anchorage - ●
- Rings or fall arrest D anchorages- (to be used in combination) - ●
- Suspension 'D's or rings - ●
- Positioning D ring - (to be used in combination) - ●

OSHA/ANSI/CSA Compliant - North America

 <p>EXOFIT™ XP™ TOWER CLIMBING HARNESS Quick-connect buckles, back stand-up D-ring, front D-ring, padded body belt with side D-rings, seat sling with positioning D-rings. Removable and washable shoulder, back, and leg padding. Size Large. 1110302 (1110302C in Canada)</p>	 <p>EXOFIT™ WIND ENERGY HARNESS Vest style, PVC coated front, back and side D-rings, quick connect buckles, with sewn-in hip pad & belt and dorsal & lumbar protection. Size Large. 1102387 (1102387C in Canada)</p>	 <p>EXOFIT™ XP CROSS-OVER HARNESS Quick-connect buckles with back and front D-rings. Removable and washable shoulder, back, and leg padding. Size Large. 1109802 (1109802C in Canada)</p>	 <p>EXOFIT™ WIND ENERGY HARNESS Vest style, PVC coated front, back and side D-rings, quick connect buckles and dorsal protection. Size Large. 1102342 (1102342C in Canada)</p>
 <p>DELTA™ II TOWER CLIMBING HARNESS Delta No-Tangle™ pad design, tongue buckle legs, back stand-up D-ring, front D-ring, padded body belt with side D-rings, seat sling with positioning D-rings. Size Large. 1107775 (1107775C in Canada)</p>	 <p>DELTA™ II CLIMBING HARNESS Delta No-Tangle™ pad design, tongue buckle legs, back stand-up D-ring, front D-ring. Size Large. 1107800 (1107800C in Canada)</p>	 <p>PRO™ CLIMBING HARNESS Vest style with back and front D-rings. Size Med/Large. 1191234 (1191234C in Canada)</p>	

CE Compliant - Europe, Middle East, Africa

<p>EXOFIT™ HARNESS Two-point fall arrest, front + rear attachment points and work positioning belt with side D-Rings. 1102416</p>		<p>EXOFIT™ HARNESS Two-point fall arrest, front + rear attachment points and side D-Rings for work positioning. 1102411</p>		<p>EXOFIT™ XP CLIMBING HARNESS Quick-connect buckles, back stand-up D-ring, front D-ring, padded body belt with side D-rings. Removable and washable shoulder, back, and leg padding. Size Medium KB11100586</p>	
 <p>EXOFIT™ CLIMBING HARNESS Quick-connect buckles, back and front D-rings, padded body belt with side D-rings. Built-in shoulder, back, and leg padding. Size Medium. KB1EXO/MB</p>		<p>DELTA™ II CLIMBING HARNESS Delta No-Tangle™ pad design, pass thru buckle legs, back stand-up D-ring, front D-ring, padded body belt with side D-rings. Size Universal. KB11101294</p>		<p>PRO™ CLIMBING HARNESS Vest style with back, front and chest D-rings. Padded body belt with side D-rings. Size Universal. AB115135</p>	

AS/NZS Compliant - Australia, New Zealand

 <p>EXOFIT™ TOWER WORKER HARNESS Rear stand-up and side D-rings, padded seat and waist belt, frontal fall arrest belay loops, quick-connect buckles and removable, washable padding. Size Medium. 450M-0016</p>	 <p>EXOFIT™ RIGGERS UTILITY HARNESS Rear stand-up D-ring, front fall arrest D-ring, confined space loops, integrated colour coded belt containment loops to accommodate Positioning Belt (available separately) quick-connect buckles, removable washable padding, Size Medium. 450M-0018</p>	<p>POSITIONING BELT Retrofits to ExoFit™ XP Riggers Utility Harnesses, Wide cushioned body pad, Side D-rings, quick-connect buckle, i-Safe™ enabled, size Medium E406M</p> 	<p>SUSPENSION SEAT Optional suspension seat incorporates a seat stiffener, suspension D-rings that can be folded back and secured to the seat when not in use and cushioned padding. 1150011</p> 
--	--	---	--

NOTE: Other Sizes, Models and Styles Available.

DBI-SALA & PROTECTA SHOCK ABSORBING LANYARDS

Innovation for Ease-of-use and Durability

Capital Safety is known as an innovator who can design and build the products you need for all your fall protection challenges. The patented DBI-SALA snap hook with easy one-hand operation is the most popular in the industry. It's just one of the lanyard features that have enhanced worker productivity and safety. Available with over 20 different connectors to fit the application, our lanyards promote safety and enhance productivity.

Lanyards are flexible lines with a connector at each end used to connect the anchorage to the body support of a fall protection system. Lanyards should be connected to the back D-ring for fall arrest, located between the shoulder blades and ideally should be anchored above the worker to minimize fall distance. The worker should not walk too far from the overhead anchorage or a swing fall may occur.

DOUBLE LEG LANYARDS OR 100% TIE-OFF LANYARDS

(Two lanyards that are connected at one end.) This style of lanyard is used to provide 100% tie-off. It allows you to stay protected while you move from one location to another.



SHOCK ABSORBING LANYARDS

Lanyards used for fall protection must include a shock absorber to dissipate the energy of the fall, limiting the forces on the body of the falling worker.



SHOCK ABSORBING STRETCH LANYARDS

For added flexibility and safety, the DBI-SALA ShockWave™ and EZ-Stop® Retrax™ lanyards are available with an expansion and contraction feature that allows them to be extended when length is needed and then contracted with the movement of the worker to avoid trips, falls and snags.



POSITIONING LANYARDS

Rope or web lanyards without shock absorbers may be used for applications that require positioning or restraint of a worker or if the fall possibility is less than 2' (0.6m).



SPECIALTY SHOCK ABSORBING LANYARDS:

Tie-back Lanyards

When a qualified anchorage connector is not available, a tie-back lanyard acts as both a connecting means and an anchorage connector. There are two styles—one incorporates a movable D-ring on the lanyard for attaching the snap hook, and the other is designed for the hook to go around the webbing itself. This requires a specialty hook with a gate strength capacity of 5,000 lbs. (22kN).

Lanyards for Tying Off at the Feet

The DBI-SALA Force2™ shock absorbing lanyard allows for a 12' (3.7m) free fall and keeps the forces below the 1,800 lb. (8kN) OSHA limit (4m free fall, 6kN for CE).

Kevlar® Lanyards

Kevlar® is a special material that is safe for high temperature environments. Also available is a Nomex®/Kevlar® shock pack cover option for extra durability.



Resist Technology Lanyards

Resist technology allows the user to easily wipe away grease and dirt while providing additional resistance against abrasion and tears.



Arc Flash Lanyards

Arc flash lanyards are made from specialized materials and arc tested to 40 cal/cm2 to meet the ASTM F887-05 standard.

SHOCK ABSORBING & POSITIONING LANYARDS

OSHA/ANSI/CSA Compliant - North America



SHOCKWAVE2™ LANYARD 
6 ft. (1.8m) double-leg stretch shock absorbing lanyard with aluminum rebar hook ends with 2-1/4" (57mm) opening.
1244409 (1221008C - pack style - in Canada)



FORCE2™ 100% TIE-OFF LANYARD 
Elastic Webbing, 2000125 SafLok Max™ Hooks on leg ends (6ft /1.82 m).
1245208




FORCE2™ 100% TIE-OFF LANYARD 
Elastic webbing with 2 1/4" (5.7cm) gated aluminum hooks on leg ends & Rescue D-rings on legs (6ft /1.8 m).
1242550



FORCE2™ 100% TIE-OFF ROPE LANYARD 
5/8" (15.8mm) polyester rope lanyard with 2-1/4" (57mm) gated aluminum hook ends.
1242525



PRO™ LANYARD 
6 ft. (1.8m) single-leg shock absorbing lanyard with standard snap hook ends with 3/4" (19mm) opening.
AE542AW2 (AE549CW1-6 in Canada)

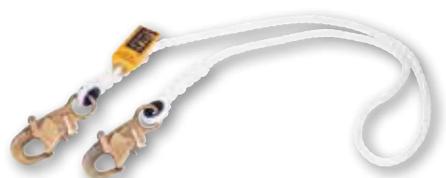

ROPE POSITIONING LANYARD 
6 ft. (1.8m) single-leg positioning lanyard with 1/2" (12.7mm) nylon rope and standard snap hook ends with 3/4" (19mm) opening.
1232354 (1202361C - 5/8" rope in Canada)

CE Compliant - Europe, Middle East, Africa



'EXPANDER'™ LANYARD 
2m double-leg stretch shock absorbing lanyard with aluminum scaffold hook ends with 57mm opening.
KE5200YX/2



'TRIGGER'™ POSITIONING LANYARD 
2m maximum length positioning lanyard uses cam adjustment for length and locking into place.
KF772000 (other lengths available)



PRO™ LANYARD 
1.8m double-leg shock absorbing lanyard with 10.5mm kernmantle rope and steel scaffold hook ends with 50mm opening.
AE532/3

AS/NZS Compliant - Australia, New Zealand



EZ-STOP™ DOUBLE TAIL LANYARD 
Twin tail webbing lanyard with 20mm opening snap hook on shock pack end and 60mm gate opening scaffold hooks on tails. Hooks feature 16kN rated gates. Also available in elasticated.
Z60200919



ADJUSTABLE LANYARD 
Adjusts from 750 mm to 2m. 38mm webbing with 19mm opening double-locking snap hooks. Also available in double tail.
Z51200909



TIE-BACK LANYARD 
2m X 38mm tie-back lanyard with 20mm opening double-locking snap hooks
Z63200909



POLE STRAP 
2m X 45mm nylon pole strap with aluminum 19mm opening double-locking snap hooks
E613-B-020-56-56

NOTE: Other Sizes, Models and Styles Available.

DBI-SALA & PROTECTA

SELF RETRACTING LIFELINES

Industry Leaders

Capital Safety has been the industry leader in the development of reliable, versatile self retracting lifelines (SRLs). Capital Safety SRL innovations include the patented Sealed SRL and the impact indicator, an important safety innovation which has now been widely adopted across the industry.

An SRL is a flexible lifeline attached to a mechanism that allows it to extend and retract under slight tension when the user moves away from and toward the device. This enables a user to work safely while moving within a recommended area at normal speeds. SRLs can be used in a variety of situations, but are primarily used to provide movement and protection of users in a vertical work area. SRLs can also be used with a horizontal lifeline to improve the overall mobility of the system, both vertically and horizontally.



HOUSING

The SRL casing protects the inner parts of the SRL and holds the excess line when not in use. Durable, impact-resistant housings offer longer wear and greater protection of the brakes and retraction springs. DBI-SALA developed the industry's only fully Sealed SRL that isolates the critical working components, protecting them from the dirt, oil or grease that the retracted cable can bring inside.

i-Safe™

Every DBI-SALA SRL now comes with i-Safe™, the Intelligent Safety System that incorporates RFID and web-enabled communications technologies, providing you with the ability to centrally track inspections, control field inventory and manage critical safety information.

LINE

SRL lines can be made from cable, webbing or synthetic rope. Cable is considered for rugged, outdoor applications or where the line may be in touch with sharp objects. Web is a more lightweight, compact choice, often preferred indoors for less industrial applications and for warehousing. Stainless steel offers the ultimate in corrosion resistance, reliability and longevity.

IMPACT INDICATOR

SRL's should be inspected before each use and monthly by the customers' designated competent person. Inspections are made easier with an impact indicator that immediately shows an orange or red band if the SRL has been loaded or has arrested a fall. All SRL's should be removed from service following the arrest of a fall and if the impact indicator is visible. In most cases the unit will have to be returned to an authorized service center for servicing or replacement.

SNAP HOOK

The snap hook affects ease and speed of connection. A swivel snap hook provides versatility to allow the SRL to be easily connected to a wide variety of anchorages, making it adaptable to different work structures. The patented DBI-SALA self-locking snap hook opens and connects without thumbs or fingers getting in the way.

RESERVE LIFELINE

Some SRL's have an emergency reserve lifeline feature which means that if a worker has nearly all the line extended and experiences a fall, the unit will still be capable of absorbing energy and keeping the arresting forces to a minimum.

3-WAY RETRIEVAL OPTION

Some SRL's incorporate a built-in winch retrieval mechanism. These units not only provide fall protection as a worker enters a confined space such as a sewer or tank, but also allow activation of a retrieval mechanism for fast, convenient rescue. Raising and/or lowering is fast and convenient.

QUICK ACTIVATING BRAKING SYSTEM

Many industry SRL's use a seat-belt type extension and retraction mechanism which can malfunction and lock-up when you don't want them to. DBI-SALA SRL's feature an anti-ratcheting, twin disc brake mechanism that provides smooth operation and locks only when you are ready. Once the mechanism engages, it stays locked, ensuring that the worker is not ratcheted down to the ground. The system limits arresting forces to 900 lbs. (4kN) or less. Because fall arrest begins within 2' (.6m), the required clearance distance is reduced when using DBI-SALA SRL's.

OSHA/ANSI/CSA Compliant - North America



TALON™ TWIN LEG WEB 
SELF RETRACTING LIFELINE
 6 ft (1.8m) twin-leg web self retracting lifeline, quick-connect handle, Delta™ Comfort Pad and two Velcro lanyard keepers, aluminum rebar hook ends with 2-1/4" (57mm) opening.
3102000, 3102003 (with steel hooks, same part numbers in Canada)



TALON™ WEB 
SELF RETRACTING LIFELINE
 8 ft (2.4m) web self retracting lifeline, quick-connect handle, swiveling snap hook end with 3/4" (19mm) opening.
3101001 or 3101000 with non-swiveling snap hook (3101001C, 3101000C in Canada)



REBEL™ WEB 
SELF RETRACTING LIFELINE
 11 ft (3.3m) web self retracting lifeline, swiveling snap hook end with 3/4" (19mm) opening.
AD111A (AD110BC 10 ft. (3m) in Canada)



ULTRA-LOK® WEB 
SELF RETRACTING LIFELINE
 20 ft (6m) web self retracting lifeline, swiveling snap hook end with 3/4" (19mm) opening.
3103208 or 3103108 with 11ft (3.3m) length (3103208C, 3103108C in Canada)



ULTRA-LOK® CABLE 
SELF RETRACTING LIFELINE
 30 ft (9m) cable self retracting lifeline, swiveling snap hook end with 3/4" (19mm) opening. Also available in 20' (6m), 50' (15m) and 85' (25m) lengths.
3504430 (3504430C in Canada)

CE Compliant - Europe, Middle East, Africa



TALON™ TWIN LEG WEB 
SELF RETRACTING LIFELINE
 2m twin-leg web self retracting lifeline, quick-connect handle, Delta™ Comfort Pad and two Velcro lanyard keepers, aluminum rebar hook ends with 2-1/4" (57mm) opening.
KD1ALTWIN



ULTRA-LOK® WEB 
SELF RETRACTING LIFELINE
 6m web self retracting lifeline, swiveling snap hook end with 3/4" (19mm) opening.
KD1PWB610



ULTRA-LOK® CABLE 
SELF RETRACTING LIFELINE
 15m cable self retracting lifeline, swiveling snap hook end with 3/4" (19mm) opening. Also available in 6m, 9m and 26m lengths.
KD23504450

AS/NZS Compliant - Australia, New Zealand



TALON™ TWIN LEG WEB 
SELF RETRACTING LIFELINE
 1.8m twin-leg web self retracting lifeline, quick-connect handle, Delta™ Comfort Pad and two Velcro lanyard keepers, aluminum scaffold hook ends with 2-1/4" (57mm) opening.
3102010



TALON™ WEB 
SELF RETRACTING LIFELINE
 2.4m web self retracting lifeline, quick-connect handle, swiveling snap hook end with 3/4" (19mm) opening.
3101001



ULTRA-LOK® CABLE 
SELF RETRACTING LIFELINE
 9m cable self retracting lifeline, swiveling snap hook end with 3/4" (19mm) opening. Also available in 6m, 15m and 25m lengths.
3504433

NOTE: Other Lengths, Models and Styles Available.

DBI-SALA & PROTECTA VERTICAL SYSTEMS

The Lad-Saf® Powered Climb Assist System was specifically developed to provide both climbing assistance and fall protection for those who climb the internal ladders of wind turbines. This unique system does not require a separate or secondary fall protection system, which is unlike any other system on the market today. Our "dual" system approach saves time and money, simplifies safety and increases worker productivity.

OSHA/ANSI/CSA Compliant - North America



LAD-SAF® POWERED CLIMB ASSIST SYSTEM

- 6160006:** Lad-Saf® Powered Climb Assist System
Includes top bracket, bottom bracket and motor assembly.
- 9504786:** Control panel for system
- 6160003:** Intermediate cable guide (if required)
- 6170000:** Cable assembly; to order, double the length of your ladder & add 20 ft (6m) Note: Last three digits in part number total length needed.
- 6116540:** Lad-Saf® Detachable Sleeve with attached 2000112 carabiner, for use with 8mm or 3/8" wire rope cable.

OSHA/ANSI/CSA Compliant - North America, • CE Compliant - Europe, Middle East, Africa • AS/NZS Compliant - Australia, New Zealand



LAD-SAF® FLEXIBLE CABLE LADDER SAFETY SYSTEM

The swiveling Lad-Saf® sleeve prevents falls by locking onto the cable. It is easily attached or removed anywhere along the cable and automatically follows as you climb or descend.

6116507: Lad-Saf® Safety Sleeve
For use on 8.00mm (5/16") to 9.5mm (3/8") cable.
Comes with shock pack.
OSHA/ANSI/CSA Compliant - North America
CE Compliant - Europe, Middle East, Africa.

6116540: Lad-Saf® Safety Sleeve
For use on 8.0mm (5/16") to 9.5mm (3/8") cable.
OSHA/ANSI/CSA Compliant - North America.

Stainless steel models are also available. Please call for more information.



OSHA/ANSI/CSA Compliant - North America



LAD-SAF® STATIC WIRE ROPE GRAB

Device stays locked in place once positioned on cable lifeline. For use on 3/8" (9.5mm) 7x9 galvanized or stainless steel cable. Use with a 4 ft. (1.2m) max length shock absorbing lanyard.

5000338 (Same in Canada)



LAD-SAF® MOBILE ROPE GRAB

Automatically follows user hands-free for maximum freedom of movement. Utilizes both inertia and cam locking systems for added safety. For added flexibility, it can be attached or removed anywhere along the lifeline. For use on 5/8" (16mm) rope with a 3 ft. (.9m) max length shock absorbing lanyard.

5000335 (5000335C in Canada)



ROPE LIFELINE

30 ft (9m) 5/8" (16mm) blended polyester/polypropylene rope, snap hook at one end, taped at other end. Available in other lengths.

1232754 (1202754C in Canada)

STATIC ROPE

ADJUSTER WITH LANYARD

Rope adjuster with permanently attached EZ-STOP® III 3 ft (.9m) shock absorbing lanyard. Device stays locked in place once positioned. For use on 5/8" (16mm) rope. **1224005 (not available in Canada)**



CE Compliant - Europe, Middle East, Africa



KERNMANTLE ROPE GRAB

For use on 11mm kernmantle rope; with attached karabiner & lanyard.

KC2LRG1REM



LAD-SAF® MOBILE ROPE GRAB

Automatically follows user hands-free for maximum freedom of movement. Utilizes both inertia and cam locking systems for added safety. For added flexibility, it can be attached or removed anywhere along the lifeline. For use on 16mm rope with a 3 ft. (.9m) max length shock absorbing lanyard.

5000337



COBRA™

STATIC/MOBILE ROPE GRAB

Attach or detach anywhere along the lifeline for vertical hands free operation. Fits 12 or 14mm diameter rope. Comes with screw gate karabiner with 17mm opening. **AC202/01**

Available Lifeline for COBRA™ AC205 - 14mm 3-strand twisted rope Anchorage Line with Karabiner (5 - 50m lengths)



CABLOC™

LADDER SAFETY SYSTEM WITH ABSORBER

System is permanently installed to provide secure access to the work station. Secures the user against falls during ascent/descent, sliding freely on a cable fixed along length of ladder.

AC350/4 Cabloc Device

AS/NZS Compliant - Australia, New Zealand



LAD-SAF® SLEEVE WITH SHOCK ABSORBER

The swiveling Lad-Saf® sleeve prevents falls by locking onto the cable. It is easily attached or removed anywhere along the cable and automatically follows as you climb or descend.

24A-L3330



VIPER™

MOBILE ROPE GRAB

Automatically follows, giving greater freedom of movement and virtually hands-free operation. Grab will not snag while climbing. For 11-13mm Kernmantle Rope.

AC400

DBI-SALA & PROTECTA RESCUE, ESCAPE & DESCENT SYSTEMS

Reliability When You Need It the Most

When it comes to rescue, it is essential that equipment operates perfectly...and fast. Capital Safety has developed a complete line of rescue, escape and descent systems that are more effective than any other in the industry. Safety engineers and site directors trust Capital Safety for the type of high quality, rugged systems that will ensure top performance when it is needed.

Rescue and retrieval are critical components of any fall protection program. The fast and effective performance of these tasks often means the difference between a non-injury fall and one resulting in serious worker harm. Often the longer a fallen employee remains suspended or trapped, the worse his injuries.

Rescue and descent equipment choices depend on the job site, the tasks being performed and the available manpower. Rescue and descent equipment includes tripods, davit arms, winches, comprehensive rescue systems and descent devices.

Rescue Basics

- If a fallen worker can be accessed using a lift, bucket or ladder, one of these should be used. In some cases industrial sites may rely on local fire departments to assist in rescue, but in-house rescue response times are usually much shorter.
- Rescuers should always be backed up with a secondary redundant system such as a belay system or SRL that is totally independent of the primary means of rescue.
- All rescue team members should receive training and practice on a regular basis.

Confined Space Rescue

Confined spaces, such as stacks, vaults, and pits, are one of the most challenging of rescue situations. Cramped space and narrow openings can make access by rescuers difficult. At the same time, these situations often present problems such as inadequate ventilation or noxious air that make immediate rescue imperative. Generally a person without oxygen for four minutes will die or suffer brain damage.

The critical nature of these rescues sometimes leads to poorly planned attempts. Two-thirds of deaths in confined space rescue occur to people trying to rescue someone else. Proper equipment to perform quick, safe rescue is essential in any operation where confined spaces must be entered. DBI-SALA confined space and rescue equipment is engineered for perfect performance in critical emergency situations.



OSHA/ANSI/CSA Compliant - North America



8516294

ROLLGLISS® RESCUE LADDER SALA

The Rollgliss® Rescue Ladder was designed to provide a means of assisted rescue after a fall has occurred. It can be anchored to a structure and dropped down to the victim's level so he or she can climb either up or down to safety. The ladder can be used by anybody that uses fall protection equipment and has been subjected to a fall, and provides a means of rescue for victims who are not unconscious. Available in 8 ft (2.4m) sections. Extra sections can be added to lengthen for specific site requirements. Ladder comes complete with three connecting carabiners enabling fast and easy anchorage to structure.

8516294: Rescue ladder, 8 ft. (2.4m) section, synthetic, with 3 connecting carabiners and carrying bag.

8516316: Accessory plate for mounting rescue ladder to a davit arm or single anchorage point.

ROLLGLISS® SRL RESCUE DEVICE SALA

The Rollgliss® SRL Rescue Device is designed to rescue a person that has fallen while using a cable self retracting lifeline. Utilizing either the anchoring chain or anchoring cable grab that comes with the system, it can be anchored to a separate structure, around the SRL housing, or in-line with the SRL cable. Once anchored, it takes seconds to complete the installation and begin the rescue procedure. Fits self retracting lifeline cable sizes from 5/32" (4mm) to 5/16" (8mm) in diameter for complete versatility. Device has an approximate lifting ratio of 6:1 - victim is raised about 5" (12cm) per stroke for rapid rescue.

3604100



ROLLGLISS® RESCUE SYSTEM SALA

Rescue system is quick to install, multifunctional, easy to use and reliable. It allows people to effortlessly ascend (or descend) in complete safety. Can be configured with different hauling ratios with interchangeable rigged pulleys in 2:1, 3:1 or 5:1, depending on need.

8902004: 50 ft (15m) system with 3:1 ratio

8902206: 100 ft (30m) system with 3:1 ratio

Note: part numbers the same in Canada

ROLLGLISS® RESCUE KIT SALA

Available in 33' (16.5m), 66' (33m), and 99' (50m) travel lengths with 7/16" (11mm) nylon lifeline. The system is simple, easily transportable and sets up quickly. Rescue can be performed safely from above, with no need to descend. Pole attaches system to victim, all raising & lowering is done from above.

8900292: 33 ft. (16.5m) System,

8900293: 66 ft. (33m) System,

8900294: 99 ft (50m) System

Note: part number same in Canada



RESCUMATIC® AUTOMATIC DESCENT CONTROL DEVICE SALA

Designed to lower workers in an emergency at a controlled rate of 3 ft (1m) per second by automatically adjusting to the user's body weight of up to 300 lbs. Includes web loop slings on both ends of the line so that multiple workers can escape, one after another. Uses 5/16" (7.8mm) wire/nylon rope.

3300100: 100' (30m) travel

3300200: 200' (60m) travel

Note: part number the same in Canada

RPD - RESCUE POSITIONING DEVICE SALA

Provides a safe and simple rescue system and incorporates features for general raising/lowering and positioning during normal work activities. Includes a speed sensing lock for added safety & allows manual lock off of the device. The device may be operated by the user or a second standby worker.

3602050: 50 ft. (15m) system

with 4:1 ratio, 250' (75m) rope

Note: part number same in Canada



ROLLGLISS®
SRL RESCUE DEVICE
3604100



ROLLGLISS® R500 RESCUE & ESCAPE DEVICE

The Rollgliss® R500 offers the choice of controlled descent rescue, evacuation or the versatility of assisted rescue with lifting capabilities. The system can be used for rescue and evacuation from heights up to 1,000 ft. (300m) for one user 310 lb. (140kg) or 330 ft. (100m) for two users totaling 550 lbs. (248kg). During assisted-rescue scenarios, a fallen worker can be attached to the R500 device, raised to a point that allows their fall arrest device to be removed, then lowered to the ground safely.

OSHA/ANSI Compliant Models - USA only.

3320050



3321050



3322050



3324050



3323050



ROLLGLISS® R500 OSHA/ANSI COMPLIANT MODELS

Model #	Description	Travel Length	Rescue Hub	Ladder Bracket	Humidity Resistant Case	Three Anchor Slings	Three Carabiners	Pulley	Edge Protector	Rope Grab	Carrying Bag
3320050	Rollgliss® R500 Descender	50 ft. (15m)	✓	✓		✓	✓	✓	✓	✓	✓
3321050	Rollgliss® R500 Descender	50 ft. (15m)	✓			✓	✓	✓	✓	✓	✓
3322050	Rollgliss® R500 Descender	50 ft. (15m)				✓	✓	✓	✓	✓	✓
3324050	Rollgliss® R500 Descender	50 ft. (15m)	✓	✓	✓	✓	✓	✓	✓	✓	✓
3323050	Rollgliss® R500 Descender	50 ft. (15m)	✓		✓	✓	✓	✓	✓	✓	✓

NOTE: Other lengths available in 25 ft. (7.5m) increments - last three digits in part number signify length.

CE Compliant - Europe, Middle East, Africa

ROLLGLISS® R500 RESCUE & ESCAPE DEVICE

The Rollgliss® R500 offers the choice of controlled descent rescue, evacuation or the versatility of assisted rescue with lifting capabilities. The system can be used for rescue and evacuation from heights up to 300m for one user 140kg or 100m for two users totaling 248kg. During assisted-rescue scenarios, a fallen worker can be attached to the R500 device, raised to a point that allows their fall arrest device to be removed, then lowered to the ground safely. *Accessory kits and cases are also available. Please call for more information.*



ROLLGLISS® R500  RESCUE & ESCAPE DEVICE
With rescue hub and 40m of 9.5mm kernmantle rope.
3331040

Note: Other lengths available in 10m increments – last three digits in part # signify length. Please call for more information.



ROLLGLISS® R500  RESCUE & ESCAPE DEVICE
With rescue hub, ladder bracket and 40m of 9.5mm kernmantle rope.
3330040

Note: Other lengths available in 10m increments – last three digits in part # signify length. Please call for more information.



ROLLGLISS® R500  RESCUE & ESCAPE DEVICE
With 40m of 9.5mm kernmantle rope.
3332040

Note: Other lengths available in 10m increments – last three digits in part # signify length. Please call for more information.



ROLLGLISS® R350 
Rescue system is quick to install, multifunctional, easy to use and reliable. It allows people to effortlessly ascend (or descend) in complete safety. Can be configured with different hauling ratios with interchangeable rigged pulleys in 2:1, 3:1 or 5:1, depending on need.
AG6350ST31 – system with 3:1 reduction



BIMATIC™ 
Enables the successive evacuation of multiple persons without loss of time. Evacuates from heights of 5 to 100m. Galvanised 5 mm cable with woven sheathing Speed of descent is self-controlled at 1.2 m/s. Maximum load 136 kg.
AG152



ROLLGLISS® RESCUE KIT 
Available in 16.5m, 33m, and 50m travel lengths with 11mm nylon lifeline. The system is simple, easily transportable and sets up quickly. Rescue can be performed safely from above, with no need to descend. Pole attaches system to victim, all raising & lowering is done from above.
AG63501010



RESCUMATIC® AUTOMATIC DESCENT CONTROL DEVICE 
Designed to lower workers in an emergency at a controlled rate of 1m per second by automatically adjusting to the user's body weight of up to 135 kg. Includes web loop slings on both ends of the line so that multiple workers can escape, one after another. Uses 7.8mm wire/nylon rope.
KG1P100

AS/NZS Compliant - Australia, New Zealand



ROLLGLISS® R250 RESCUE KIT 
available in 10m, 20m, 30m, 50m and 100m travel lengths with 11mm nylon lifeline. The system is simple, easily transportable and sets up quickly. Rescue can be performed safely from above, with no need to descend. Pole attaches system to victim, all raising & lowering is done from above.
AG62501050 – 50m system



RESCUMATIC® AUTOMATIC DESCENT CONTROL DEVICE 
Designed to lower workers in an emergency at a controlled rate of 1m per second by automatically adjusting to the user's body weight of up to 135 kg. Includes web loop slings on both ends of the line so that multiple workers can escape, one after another. Uses 7.8mm wire/nylon rope.
3300000

ROLLGLISS® R350 RESCUE KIT 
Rescue system is quick to install, multifunctional, easy to use and reliable. It allows people to effortlessly ascend (or descend) in complete safety. Can be configured with different hauling ratios with interchangeable rigged pulleys in 2:1, 3:1 or 5:1, depending on need. Includes pick pole.
R3503050P – 50m System with 3:1 reduction

NOTE: Other Sizes, Models and Styles Available.



DBI-SALA & PROTECTA ANCHORAGES AND ANCHORAGE CONNECTORS

Security to Match the Task

Anchorage connectors are dependent on the specific requirements of the purchaser, including the type of attachment, the environment and the connecting system. Capital Safety offers the most complete line of anchorage connectors available, rigorously tested to ensure the strength you need. This means you can always find the best product to fit your requirements.



Anchorage

An anchorage is a secure point of attachment for the fall arrest system. The anchorage must be capable of supporting a load of 5,000 lb. (22kN) per worker attached to the anchorage or shall be designed, installed and used as part of a complete personal fall

arrest system which maintains a safety factor of at least 2.

Anchorage may be certified (designed or engineered on site for fall protection) or non-certified (beams, trusses or other suitably strong structures). Certified anchorages should be identified with paint or special markings

and kept on a site location list.

Anchorage Connectors

Anchorage connectors provide a means of attaching the system to the anchorage. These vary widely depending on application. Some of the common types are anchor slings, beam clamps, rail sliders, trolleys and eyebolts.

OSHA/ANSI/CSA Compliant - North America

MOBI-LOK™ VACUUM ANCHOR SHOP AIR POWERED



Shop Air-Powered System is compact and lightweight. Its one-piece design makes it quick and easy to set up and use. Can power one additional Secondary Pad. Carrying case included. **2200107 (Same in Canada)**

MOBI-LOK™ SCVA COMPRESSED GAS BOTTLE POWERED



Compressed Gas Bottle Powered System is completely self-contained. It is powered up with a single, on-board 48-cubic inch compressed gas bottle or a large capacity detached bottle, or shop air. Can power one additional Secondary Pad. Carrying case included. **2200108 (Same in Canada)** **2200078 - Cylinder (Same in Canada)**



TIE-OFF ADAPTOR

Pass thru design. 1-3/4" (44mm) polyester strap, 3" (76mm) wear guard, zinc plated steel hardware. **1003000 - 3' (.9m) length**



D-RING & ANCHORAGE PLATE

Bolted or weld on, two 1/2" (12mm) attachment holes, 1/4" x 2" x 4-1/4" (6mm x 50mm x 108mm). **2101630 - Stainless plate, zinc plated D-ring**



SAFLOK® CARABINERS

Self-closing/self-locking gate for increased safety and security, steel construction, user friendly even with gloves. Compatible with most connecting rings. **2000112 - 11/16" (17mm) gate opening** **2000113 - 1-3/16" (30mm) gate opening** **2000114 - 2-3/16" (55mm) gate opening**



CABLE CHOKER

Pass thru design, 7 x 19-3/8" (9.5mm) stainless steel cable, dual O-ring pass thru, zinc plated steel hardware. **5900550 - 4' (1.2m) length**



FIRST-MAN-UP™ SYSTEM

Provides a complete system to mount a tie-off adaptor to an overhead anchorage. **2104531 - 8'-16' (2.4m-4.9m)** **2104530 - 6'-12' (1.8-3.6m)**, Adjustable pole, fixture for Original Hook



HANDGRIP

Attaches around piping up to 2" (5cm) in diameter. **AJ301A**



EYEBOLT ANCHOR

D-ring anchor with threaded bolt, nut and lock washer. **AN112A (AN112C in Canada)**

ANCHORAGES & ANCHORAGE CONNECTORS / ACCESSORIES

CE Compliant - Europe, Middle East, Africa

MOBI-LOK™ VACUUM ANCHOR SHOP AIR POWERED



Shop Air-Powered System is compact and lightweight. Its one-piece design makes it quick and easy to set up and use. Can power one additional Secondary Pad. Carrying case included. **2200125**

MOBI-LOK™ SCVA COMPRESSED GAS BOTTLE POWERED



Compressed Gas Bottle Powered System is completely self-contained. It is powered up with a single, on-board 48-cubic inch compressed gas bottle or a large capacity detached bottle, or shop air. Can power one additional Secondary Pad. Carrying case included. **2200126**
2200085 - Cylinder



 **ANCHORAGE PLATE**
Stainless steel - 3.5 mm thickness, fixed with stainless steel bolts, ø 12 mm
AM210



 **TIE-OFF ADAPTOR**
45mm 100% polyester web, 8mm diameter bar, stainless 316 with polished finish. 6mm reinforced rubber anti slip interior surface.
KM418 - 83cm length



 **KARABINERS**
Self-closing/self-locking gate for increased safety and security, steel construction, user friendly even with gloves. Compatible with most connecting rings
AJ501 - 18mm gate opening, galvanized steel
AJ514 - 17mm screw gate opening, galvanized steel
AJ593 - 50mm gate opening, carbon steel, zinc plate
ADDITIONAL SIZES/CONSTRUCTION AVAILABLE



 **ANCHORAGE RING**
Stainless steel, fixed with stainless steel bolts, ø 12 mm
AM211



 **TIE-OFF CHOKER**
45mm 100% polyester web, 8mm diameter bar, stainless 316 with polished finish. 6mm reinforced rubber anti slip interior surface.
KM419 - 83cm length
KM421 - 150cm length



 **WEB SLING**
25mm Wide nylon webstrap
AM450/80 - .8M
AM450/150 - 1.5M



 **CABLE SLING**
6mm Diameter coated wire rope, galvanized finish, thimbled ends
AM401G - 1M
AM402G - 2M

AS/NZS Compliant - Australia, New Zealand

MOBI-LOK™ VACUUM ANCHOR SHOP AIR POWERED



Shop Air-Powered System is compact and lightweight. Its one-piece design makes it quick and easy to set up and use. Can power one additional Secondary Pad. Carrying case included. **2200107**

MOBI-LOK™ SCVA COMPRESSED GAS BOTTLE POWERED



Compressed Gas Bottle Powered System is completely self-contained. It is powered up with a single, on-board 48-cubic inch compressed gas bottle or a large capacity detached bottle, or shop air. Can power one additional Secondary Pad. Carrying case included. **2200108**
2200078 - Cylinder



 **ROUND STRAP**
45mm Web. Available in 0.6m, 1m, 1.5m, 2m.
E87-006 - .6m length
E87-010 - 1m length
E87-015 - 1.5m length
E87-020 - 2m length



 **TIE-OFF ADAPTOR**
Incorporates a wear pad to extend product life. 75mm Web.
E849-010 - 1m length
E849-015 - 1.5m length
E849-020 - 2m length



 **KARABINERS**
DBI-SALA offers a selection of karabiners that are used as connecting elements for different segments of a personal fall arrest system. Our karabiners are suitable for diverse environments ensuring there are no weak links in the world's premier safety systems.
R108 - 50mm gate opening
R523 - 20mm gate opening

Globally Compliant Accessories



HARNESS HYDRATION SYSTEM 
Uniquely designed pack holds 50 oz. (1.5L) of liquid at the right temperature and conveniently connects to any DBI-SALA harness for easy hydration. **1150174 - 50oz (1.5L) capacity**



SUSPENSION TRAUMA SAFETY STRAP 
Allows suspended worker to stand up in their harness to relieve pressure. Continuous loop design allows for either one or two foot suspension relief without pinching. **9501403 (9501403C in Canada)**



DELTA COMFORT BACK PAD 
Provides extra comfort throughout the neck, shoulders and back. One-piece design eliminates shoulder pad slippage. The extra padding helps distribute weight. **9501207 (North America, AU/NZ), KK09501207 (Europe, Middle East, Africa)**



TOOL LANYARD 
The Tool Lanyard reduces workplace injury and equipment damage by allowing you to connect your tools to your tool belt or harness. **1150911**



11 POCKET TOOL BAG 
Holds tools and fasteners providing added versatility and gear carrying options. **9504066**



15 POCKET TOOL BAG 
Holds tools and fasteners providing added versatility and gear carrying options. **9504072**



DORSAL WEB COVER
Helps protect dorsal webbing while climbing or descending. **1150037**

TRAINING & CONSULTING

Anytime, Anywhere... Our Site or Yours!

Capital Safety recognizes that our commitment to the life-and-death field of fall protection means that every product we produce must meet or exceed the toughest standards. But we also know that even the best equipment must be used correctly. This is why we have established our training division with the same care and attention that is critical in our manufacturing process.

Effective training means hands-on experience

The key to effective fall protection training is practical, hands-on experience. We offer a full range of fall protection and industrial rescue courses on-site or at one of our four state-of-the-art training centers located throughout the world.

Courses on-site apply professional training to your specific daily work activities. Courses at our institutes provide controlled environments uniquely designed to offer practical experience with scaffolding, fixed ladders, towers, sloped roofs, rebar and climbing walls, elevated catwalks, I-beams and confined spaces.

- *Training from top industry professionals*
- *Easy-to-understand training manuals*
- *Backed by decades of company experience*
- *Bilingual or all-Spanish instruction available*
- *State-of-the-art training facilities*
- *Wind Energy training classes now available*

Wind Energy Training Duration: 4 Days (32 hours)

The Wind Energy course is designed for all levels of workers including managers, immediate supervisors and authorized persons or workers at height in the construction and maintenance of wind turbines. This course also includes the Competent Person and Competent Inspector course.

Overview: This course is for individuals working in the construction and maintenance of wind turbines, for all levels from worker to manager, and aims to give both an understanding of the dangers involved in the individual segments, but also product use and inspection knowledge. The course is a pass/fail program and incorporates extensive classroom and practical sessions and examinations in accordance with national and regional legal requirements.

Topics Discussed:

- * Legislation overview
- * Working at height in Wind Turbines
- * Fall protection in turbine construction
- * Fall Protection in turbine maintenance
- * Rescue and evacuation
- * Fall protection overview
- * Fall protection products and principles
- * Rescue and evacuation products
- * Rescue Principles
- * Inspection of Equipment
- * Inspection logs
- * Theoretical examination

Students will expand their knowledge and ability to identify hazardous conditions, develop programs and make equipment selections to properly deal with fall hazards and perform rescues in turbines and towers. Upon successful completion of this course, the student will receive a certificate acknowledging they have met or exceeded national and regional legal requirements as a Competent Person.



For more details on our training programs, customized site specific training, Wind Energy and specialty courses, please contact us!





www.capitalsafety.com

You can also find us on Facebook and YouTube!



capital
SAFETY

Leaders in safety innovation

Capital Safety, home of the DBI-SALA and PROTECTA brands is the world's leading manufacturer dedicated solely to fall protection. We are also the pioneer in the development of intelligent safety technology, leading the way toward a new era of safety management solutions. We are committed to providing new and improved systems to give you the complete confidence you need in your safety program.

- QUALITY for the performance you can trust.
- BREADTH for the best and most cost effective solutions.
- EXPERTISE to meet your unique fall protection requirements.
- TRAINING to ensure and motivate safety compliance.
- INNOVATION to improve your safety and productivity.



Contact Us Today

Capital Safety - USA

3833 SALA Way
Red Wing, MN 55066-5005
Phone: 651-388-8282
Toll Free: 800-328-6146
Fax: 651-388-5065
email: info@capitalsafety.com

Capital Safety - Canada

260 Export Boulevard
Mississauga, ON L5S 1Y9
Phone: 905-795-9333
Toll Free: 800-387-7484
Fax: 888-387-7484
email: info.ca@capitalsafety.com

Capital Safety - Asia

N°6 Tuas Avenue 18
638892
Singapore
Phone: +65 - 65587758
Fax: +65 - 65587058
email: inquiry@capitalsafety.com

Capital Safety

Australia/New Zealand

20 Fariola Street Silverwater
Sydney NSW 2128 Australia
Phone: +(61) 2 9748 0335
Toll-Free : 1800 245 002 (AUS)
Toll-Free : 0800 212 505 (NZ)
Fax: +(61) 2 9748 0336
email: sales@capitalsafety.com.au

Capital Safety - EMEA Europe, Middle East, Africa

Le Broc Center
Z.I. 1ère Avenue - 5600 M - BP15
06511 Carros - Le Broc Cedex France
Phone: + 33 4 97 10 00 10
Fax: + 33 4 93 08 79 70
email: information@capitalsafety.com

Capital Safety Northern Europe

Unit 7 Christleton Court
Manor Park
Runcorn
Cheshire, WA7 1ST
Phone: + 44 (0)1928 571324
Fax: + 44 (0)1928 571325
email: csgne@csgne.co.uk

Capital Safety - Latin America

3833 SALA Way
Red Wing, MN 55066-5005
Unite States
Phone: +1 651.385.6214
Toll Free: 800-328-6146
Fax: 651-388-5065
email: info@capitalsafety.com

www.capitalsafety.com