




## Lineman's Hoists Exclusive Features from the Reliable Leader

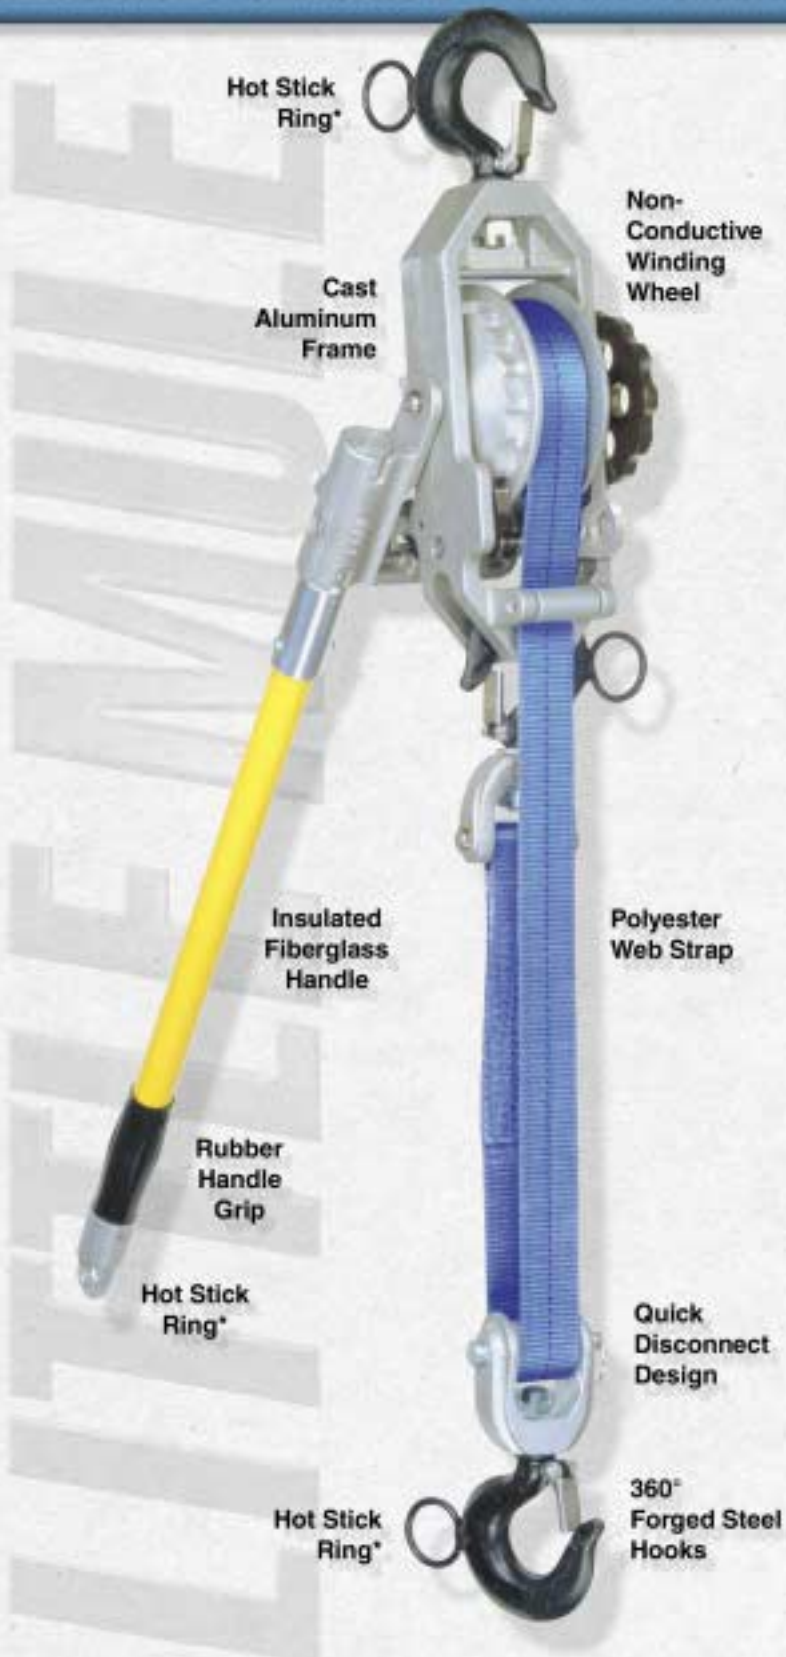

### **Extra Measure of Reliability**

- **Fiberglass Handle and Polyester Webbing**— Provides added nonconductive material when using proper hot line handling techniques.
- **Overload Feature**— Solid fiberglass handle, with replaceable tips, bends to alert the operator of a possible overload.
- **Hooks and Gate Latches**— All hooks swivel 360° and are equipped with latches. Optional hooks with gate latches can also be added. See models on following page.
- **Positive Load Holding in All Environments**— Double interlocking pawls assures one pawl is engaged at all times. Dual pawl springs provide unsurpassed reliability.
- **Meets or exceeds minimum 4:1 design factor and all requirements of ASME/ANSI Standard B-30.21.** All units tested at 125% of rated load.

### **Lightweight and Rugged**

- **Durable and Portable**— Special cast aluminum frames.
- **Corrosion Resistant**— Stainless steel springs, drum shafts, and plated roller shafts.
- **Reduced Wear**— All rotating shafts are mounted on bronze bushings.

### **Easy to Operate**

- **Self-Storing Web Drum**— Provides compact operation.
- **Fast Webbing Take-up**— Non-conductive winding wheel provided for quick take-up or positioning of slack webbing.
- **Easy Load Positioning**— Utilizes a double pawl system with multiple pawl stops for precise load adjustment.
- **Open Construction**— Allows for easy cleaning and inspection.
- **Easily Removed Sheave Block**— Utilizing a quick disconnect design. Converts hoist for single line use.

### **⚠ WARNING**

Overloading and Improper Use Can Result in Injury.  
See Warning on Back Cover.

\* Standard on DB and DHB models

# Choice of Hooks

Make Your Application Efficient and Effective



## Standard Hook

Forged steel hooks provide lasting strength and durability. Hooks will bend open under extreme overload situations. Latches are standard.



## Hot Stick Hook

Hot stick hooks have a welded ring for use with holding sticks. Latches are standard.



## Swivel Gate Hook

Bullard-type, swivel gate latch provides positive locking action for secure load holding in all environments.



## Hot Stick Hook & Gate Latch

Hot stick gate latch models have rings on the latch and the hook for use on energized lines. Holding sticks easily maneuver the latch and hooks.

## SPECIFICATIONS

Lineman's Hoists • Single & Double Line • 1500 - 4000 Lbs.

Model Number	SINGLE LINE			DOUBLE LINE			Web Strap Length (Ft.)	Handle Length (In.)	Ship Weight (Lbs.)
	Capacity (Lbs.)	Lift (Ft.)	Hook to Hook (Min.) (In.)	Capacity (Lbs.)	Lift (Ft.)	Hook to Hook (Min.) (in.)			
<b>322B</b>	1500	14	20	3000	7	23	15	24	12 <sup>1</sup> / <sub>2</sub>
<b>322DB</b>	1500	14	20	3000	7	23	15	24	13
<b>322CB</b>	1500	14	23	3000	7	27 <sup>1</sup> / <sub>2</sub>	15	24	12 <sup>1</sup> / <sub>2</sub>
<b>322DHB</b>	1500	14	22	3000	7	26	15	24	13
<b>344B</b>	2000	11	20	4000	5 <sup>1</sup> / <sub>2</sub>	23	12	30	12 <sup>1</sup> / <sub>2</sub>
<b>344DB</b>	2000	11	20	4000	5 <sup>1</sup> / <sub>2</sub>	23	12	30	13
<b>344CB</b>	2000	11	23	4000	5 <sup>1</sup> / <sub>2</sub>	27 <sup>1</sup> / <sub>2</sub>	12	30	12 <sup>1</sup> / <sub>2</sub>
<b>344DHB</b>	2000	11	22	4000	5 <sup>1</sup> / <sub>2</sub>	26	12	30	13

**DB** Includes Hot Stick Rings on All Hooks and Control Surfaces.

**CB** Includes Swivel-Type Gate on All Hooks.

**DHB** Includes Hot Stick-Type Gate Latch on All Hooks as well as Hot Stick Rings on All Hooks and Control Surfaces.

